




from experience toward innovation

EASYTRACK2D™ Reader


The perfect laboratory companion to identify and track your samples using barcodes.



INTUITIVE AND EFFICIENT

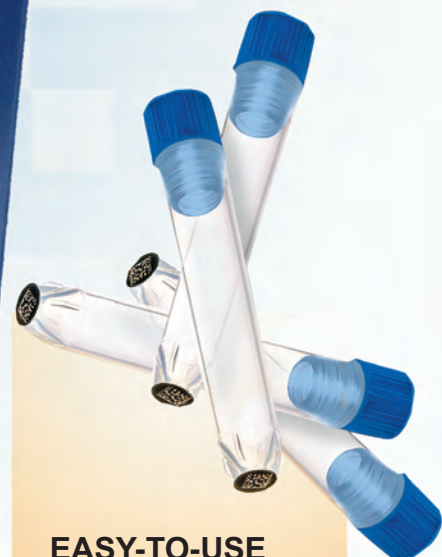

**EASY-TO-USE
AND RELIABLE**

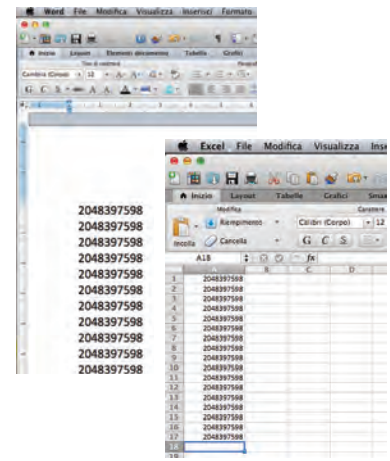

From common linear barcodes to complex and dense 2D matrices, ET2D Reader will read and store the code in your favourite spreadsheet, database or LIMS in less than a second.

No external power supply needed, just plug the USB cable and use it.

ET2D Reader is shipped already configured and ready to use.
We offer constant support to help you achieve the best and most efficient solution.

Color	Blue
Dimensions	Height max: 127 mm Length: 66 mm Width: 46 mm
Weight	310 g
Input Voltage	5VDC \pm 5% (Overvoltage tolerant to 14VDC)
Input Current (Max/Typ/Stand-by)	250mA / 180mA / 115mA
Operating Temperature	-10° to 40° C
Operating Humidity	5% to 90% relative humidity, non condensing
Ambient Light Immunity	Up to 100,000 Lux
LED Emission Class	(IEC-62471:2006-07) Exempt (No Risk)
Electrical Safety	IEC 60950-1 , CAN/CSA C22.2 No. 60950-1-07; UL 60950-1
EMI	North America (FCC) : Part 15 Class B, Canada (IC) : ICES-003 Class B, European Union EMC Directive, Australian(C-tick), Russia (Gost)

Code	Description	unit
TH- ETR4400	Single Tube Datamatrix and Linear Barcodes Reader, USB connection	1



TWIN HELIX S.r.l
Via Federico Borromeo, n. 4 - 20017 RHO (MI) - Italy
phone +390289450270 - fax +390289450279 -email info@twinhelix.eu